




## Top Signal High-Gain Grid Parabolic Antenna 600-6500 MHz N-Female

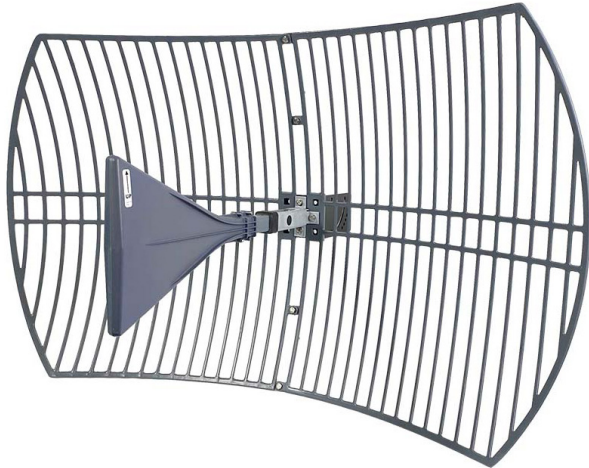


Mid Position  
700-895MHz



Mid Position  
1700-2200MHz



Mid Position  
3000-5000MHz



### Features

- Ultra wide band 2G, 3G, 4G cellular voice & data: LTE/CDMA/GSM/UMTS/AWS. 600MHz band included.
- For cellular boosters, LTE modems, WiFi devices, and new 5G, 600MHz & 3.5GHz spectrum
- Simple install kit with tilt/swivel mast bracket for 1.25 to 2" diameter pipe/mast

**PRODUCT No: TS242601**

Top Signal High-Gain Grid Parabolic Antenna

### Features:

12 to 26 dBi Gain

Outdoor

Directional

N-female

### Specifications:

Frequency Range	600-6500 MHz
Gain	12-17 dBi (600-960 MHz)
Gain	20-23 dBi (1700-2700 MHz)
Gain	23-26 dBi (3000-6500 MHz)
<b>Vertical Beam</b>	<b>Horizontal Beam</b>
23°	20° (600-960 MHz)
15°	12° (1700-2700 MHz)
9°	7° (3000-6500 MHz)
Polarization	Vertical or Horizontal
Input Impedance	50 ohm
Input Max Power	100 W
Lightning Protection	DC Ground
Antenna Connector	N-female
Antenna Dimensions	24×39×16 inch, 60×99×40 mm
Antenna Weight	5.3 lbs, 2.4 kg
Reflector Material	Aluminum
Rated Wind Velocity	130 mph, 209 km/h
Mounting Pole	1.5-2.0 inch poles
Color	Grey
Mounting Type	U-bolts with bracket (included)
VSWR	≤1.6/1.4 avg